

Project

Quantity

Item #

Model Specified:

CSI Section 11400

Roll-In Pizza Proofer

115V One Section Model, 32" Deep



Model RPP132L-FHS



Stainless Exterior,
Anodized
Aluminum Interior

One-Section Roll-In Model RPP132L-FHS

The R-Series "L-Height" Roll-In Pizza Proofer is designed for use with 66" high racks, specifically to proof pizza dough. Racks are not supplied by Traulsen. Controlled temperature in the proofer promotes yeast fermentation which generates gas and causes the dough to rise.

Specifications

Construction, Hardware and Insulation

Cabinet exterior, including front, one piece sides, louver assembly and doors are constructed of heavy gauge stainless steel. Cabinet interior and door liners are constructed of stainless steel. Exterior cabinet top and back are constructed of heavy gauge aluminized steel. The interior floor and exterior bottom are constructed of stainless steel and insulated with 3/4" of resilient cork. A readily attachable stainless steel ramp is provided.

Doors are equipped with heavy-duty, extruded wiper gasket for sealing to bottom ramp, removable plug cylinder locks and guaranteed for life cam-lift, gravity action, self-closing metal, glide hinges with stay open feature at 120 degrees. Guaranteed for life, work flow door handle is mounted horizontally over recess in door which limits protrusion from door face into aiseways.

Easily removable for cleaning, vinyl magnetic door gasket assures tight door seal.


Cabinet and door contains high density, non-CFC, foamed in place polyurethane insulation.

Heater System

Tubular heaters are employed for the uniform generation of electric heat. Air is distributed through use of a circulating fan and twin air ducts along each interior side to assure even temperature and air flow throughout the cabinet.

Controls

A digital electronic temperature controller with one countdown timer is provided. It is supplied with easy to view temperature indicator displays, conveniently located ON/OFF switch, temperature controls and timer.

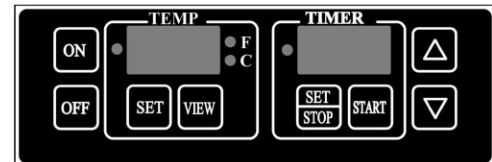

Interior

Maximum rack size with wheels inboard of frame is 21" wide by 29" deep by 66" high. Racks supplied by others.

Domestic Warranties

The standard warranty includes a one year parts and labor warranty on all components and the cabinet. Additional warranties are available at extra cost.

Standard Features

- Stainless Steel Exterior & Interior
- Self-Closing Doors With Stay Open Feature At 120 Degrees
- Guaranteed For Life Cam-Lift Hinges
- Guaranteed For Life Horizontal Work Flow Door Handle
- Stainless Steel Breaker Caps
- Magnetic Snap-In Door Gaskets
- Stainless Steel Rack Guides
- 9' Cord & Plug Attached
- 1 Year Parts And Labor Warranty

Options & Accessories

- Two Year Service/Labor Warranty Available



Listed by Underwriters Laboratories Inc., to
U.S. and Canadian safety standards and
Listed by NSF International.



TRAULSEN
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
E-Mail: steve.herman@hobartcorp.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

YUM! #T.B.A.
115V Pizza Proofer

Project

Quantity

Item #

Model Specified:

CSI Section 11400

DIMENSIONAL DATA	RPP132L-FHS
Net capacity cu. ft.	36.0 (1020 cu l)
Length - overall in.	35 ¹ / ₂ (90.2 cm)
Depth - overall in.	35 ⁹ / ₁₆ (90.3 cm)
Depth - over body in.	32 (81.3 cm)
Depth - with door open 90 degrees in.	63 ¹ / ₄ (160.7 cm)
Clear door width in.	27 ¹ / ₈ (68.8 cm)
Clear door height in.	66 ⁵ / ₁₆ (168.4 cm)
Height - overall in.	83 ¹ / ₄ (211.5 cm)
Rack Capacity	1
ELECTRICAL DATA (for domestic use)	
Voltage	115/60/1
Feed wires with Ground	3
Full load amperes	16.0
Wattage	1750
SHIPPING DATA	
Length - crated in.	41 (104 cm)
Depth - crated in.	44 (112 cm)
Height - crated in.	92 ¹ / ₂ (235 cm)
Volume - crated cu. ft.	97 (2748 cu l)
Net Wt. lbs.	435 (197 kg)
Gross Wt. lbs.	545 (247 kg)

NOTES

NOTE: Figures in parentheses reflect metric equivalents.




Supplied With One NEMA 5-20P Plug



Full load amps and plug style may vary depending on electrical options chosen and condensing unit employed.

NOTE: Freight charges are FOB factory for dock to dock delivery within the continental USA. Liftgate delivery charges are additional. For inside delivery charges, please contact your distributor.

Elevation - RPP132L-FHS

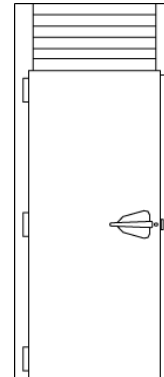

Plan - RPP132L-FHS

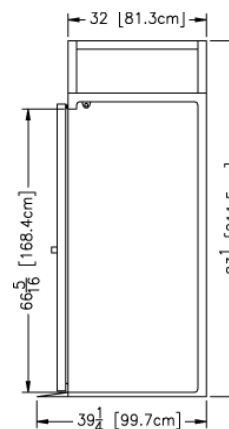

Section - RPP132L-FHS

Continued product development may necessitate specification changes without notice.
Part No. YUM! #T.B.A. (created 7/05)

YUM! #T.B.A.
115V Pizza Proofers

TRAULSEN
4401 BLUE MOUND RD.
PHONE 1 (800) 825-8220
E-Mail: steve.herman@hobartcorp.com

FT. WORTH, TX 76106
FAX-MKTG. 1 (817) 624-4302

Traulsen